




AutoSeal® 2300 Series

PRODUCTION PRESSURE SEALERS

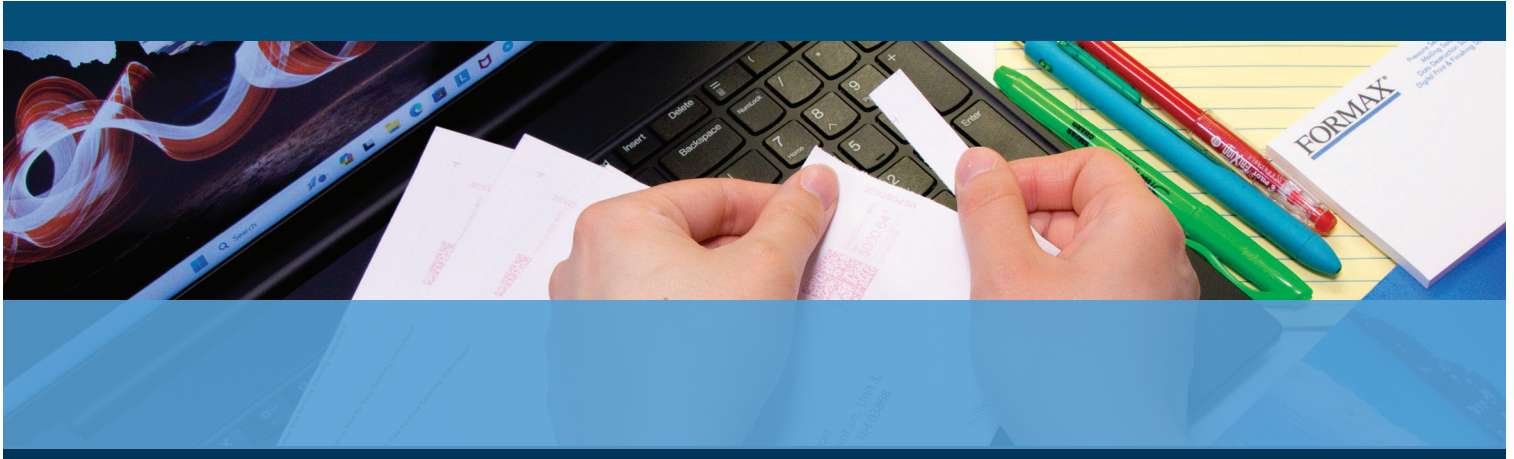

FD 2350 with pile feed system


- High-speed production processing
- Three models available
- Process up to 40,000 forms per hour
- Unlimited monthly duty cycle
- Automatic fold setting adjustments

FORMAX®


The AutoSeal® 2300 Series Production Pressure Sealers are designed to process high-volume jobs up to 40,000 forms per hour, with an unlimited monthly duty cycle. Using the graphics-based color touchscreen, operators can program up to 200 custom jobs, and process forms up to 11.5" wide and 25" long. Three models are available, with specific infeed options: the FD 2300 Air Feed System with a capacity of up to 500 forms, FD 2300-EXT Extended Air Feed System for up to 2,500 forms, and the FD 2350 Pile-Loader Infeed for up to 3,500 forms. Fully automated settings include the feeder, alignment rails, fold plate stops, deflectors and fold rollers, and delivery rollers. Standard features include an extendable output conveyor, safety interlocks, jam detection, addition/batch counter, and static eliminator. Options include the V-Stack36i Vertical Stacker.



FD 2300 Air Feed
Infeed holds up to 500 forms

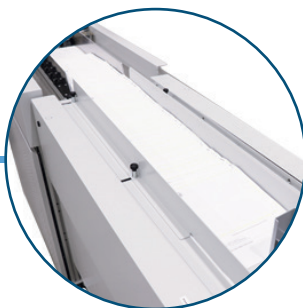


FD 2300-EXT Air Feed
Extended infeed holds up to 2,500 forms

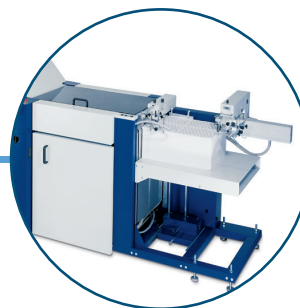

FD 2350 Pile Loader
High-capacity elevating deck holds up to 3,500 forms



Color Touchscreen
Graphics-based and designed for easy walk-up use



Optional V-Stack36i Stacker
Vertically stacks up to 22" of folded documents, for easy unloading

STANDARD FEATURES

- Three models available
- Processes up to 40,000 forms per hour
- Color touchscreen control panel
- Handles forms up to 11.5" wide x 25" long
- Fully automated settings
- Pre-programmed with 20 standard folds
- Stores up to 200 custom jobs
- Addition and batch counters
- Output conveyor adjusts from 28-42"
- Safety interlocks
- Rugged combination rollers
- Insulated fold plates for noise reduction
- Jam detection
- Static eliminator

OPTIONS

- V-Stack36i Vertical Output Stacker
- 402 Series Jogger

SPECIAL NOTES

Customer-supplied fork lift is required for installation and setup

* Capacity of up to 3,500 non-windowed forms. Forms with a traditional patch window are better suited for the FD 2300 and FD 2300-EXT.

** Three phase power is required.
NOTE: The FD 2300-EXT model requires both a 3-phase 220V outlet and a second separate 220V outlet (single phase) for the extended airfeed deck.

SPECIFICATIONS

Hopper Capacity (right-to-left operation)	FD 2300: up to 500 forms FD 2300-EXT: up to 2,500 forms FD 2350: up to 3,500 forms*
Variable Speed	Up to 40,000 sheets per hour
Usage	High-volume production
Form size	FD 2300/2350: Up to 11.5" W x 25" L (292 x 635cm) FD 2300-EXT: Up to 11.5" W x 14" L (292 x 356cm)
Dimensions	FD 2300/2350: 152" L x 30" W x 56" H (386 x 76 x 142cm) FD 2300-EXT: 167" L x 30" W x 56" H (425 x 76 x 142cm)
Weight	Approximately 1,200 lbs (544kg)
Power	208V, three phase, 20A** Special 3-Phase power required
Power Plug	NEMA L21-20P plug included, NEMA L21-20R receptacle required

formax



บริษัท ด็อกคิวซิส (ไทยแลนด์) จำกัด
10/2 ถ.กาญจนาภิเษก แขวงประเวศ เขตประเวศ กรุงเทพฯ 10250

☎ 02 643 8725-7 📠 02 115 1414

✉ info@docusys.co.th
🌐 www.docusys.co.th



Print-room Automation | Mail-room Automation | Office Automation



DOCUSYS
across asean, since 2003